

Connect the Wheel Alignment Frame via Wi-Fi


1

Turn on the MaxiSys tablet. Tap the **Settings** application on the MaxiSys Job Menu.



2


Tap **Wheel Alignment Settings** on the left column. Select **Wheel Alignment Frame Connection** to enter the screen.

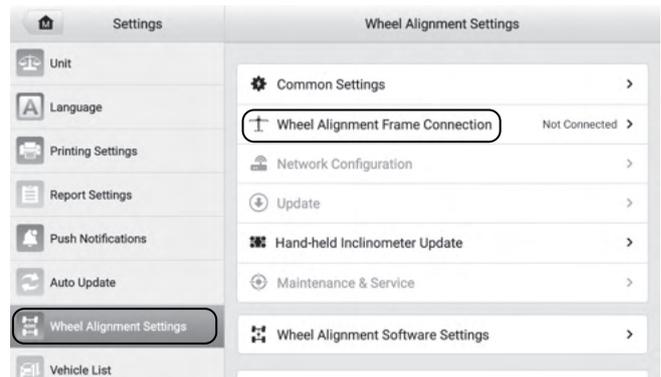

3

Tap the Wi-Fi toggle switch to enable Wheel Alignment Wi-Fi. The tablet will search for available units. The Wi-Fi name of the frame will be "ADAS", suffixed with a serial number. Tap the appropriate unit to connect. When a connection is established, the connection status reads "Connected".


NOTE: It may take up to 30 seconds to connect the tablet to a wheel alignment frame. Please wait patiently.

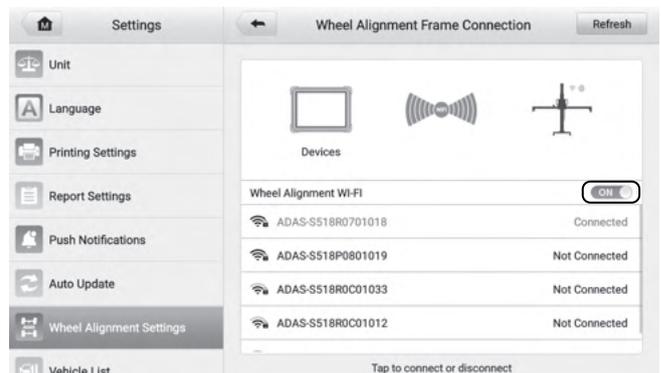

Connect the MaxiSys Tablet to Your Wi-Fi Network


1

Tap **Settings** > **Wheel Alignment Settings** and select **Network Configuration** to enter the screen.

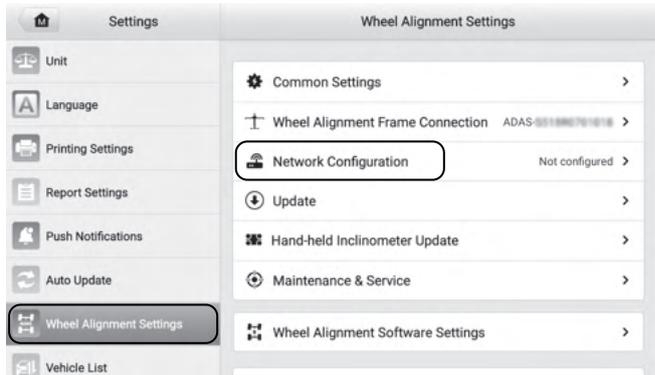


2

Tap the dropdown list. Select your Wi-Fi network and enter your password when prompted.

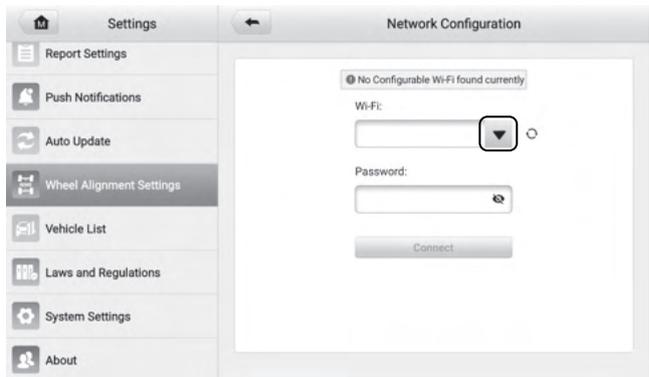

3

Tap the **Connect** button to connect to the selected Wi-Fi network. Once connected successfully, a confirmation message will appear.

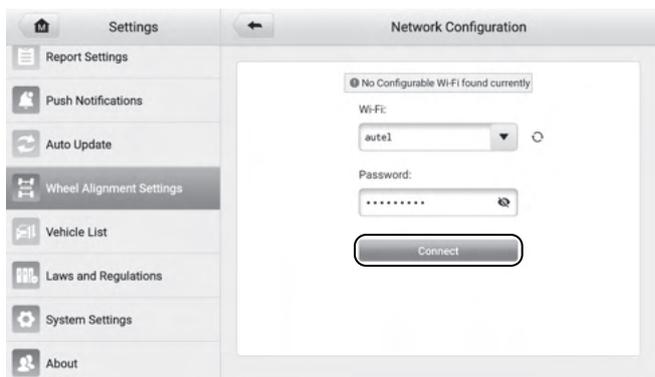

NOTE: The illustrations in this Quick Reference Guide are for reference only. The actual screens may differ.