

Important Information! Read to Avoid Damaging Your Lift

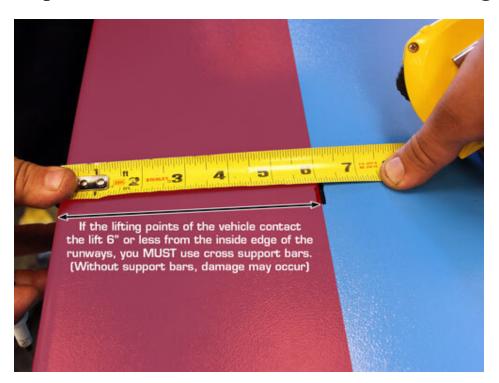

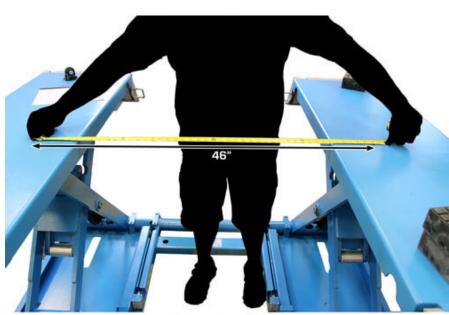

If the lifing points of the vehicle are less than 46" apart (wide), you MUST use cross support bars. (Without support bars, damage may occur)