


geoliner® 920

MEASURES ALL TYPES OF VEHICLES

- ✓ Medium & Heavy-Duty Trucks
- ✓ Articulated busses
- ✓ Transporter vehicles
- ✓ Complete carriages (truck + semi-trailer)
- ✓ Busses
- ✓ Trailers
- ✓ Semi-trailers

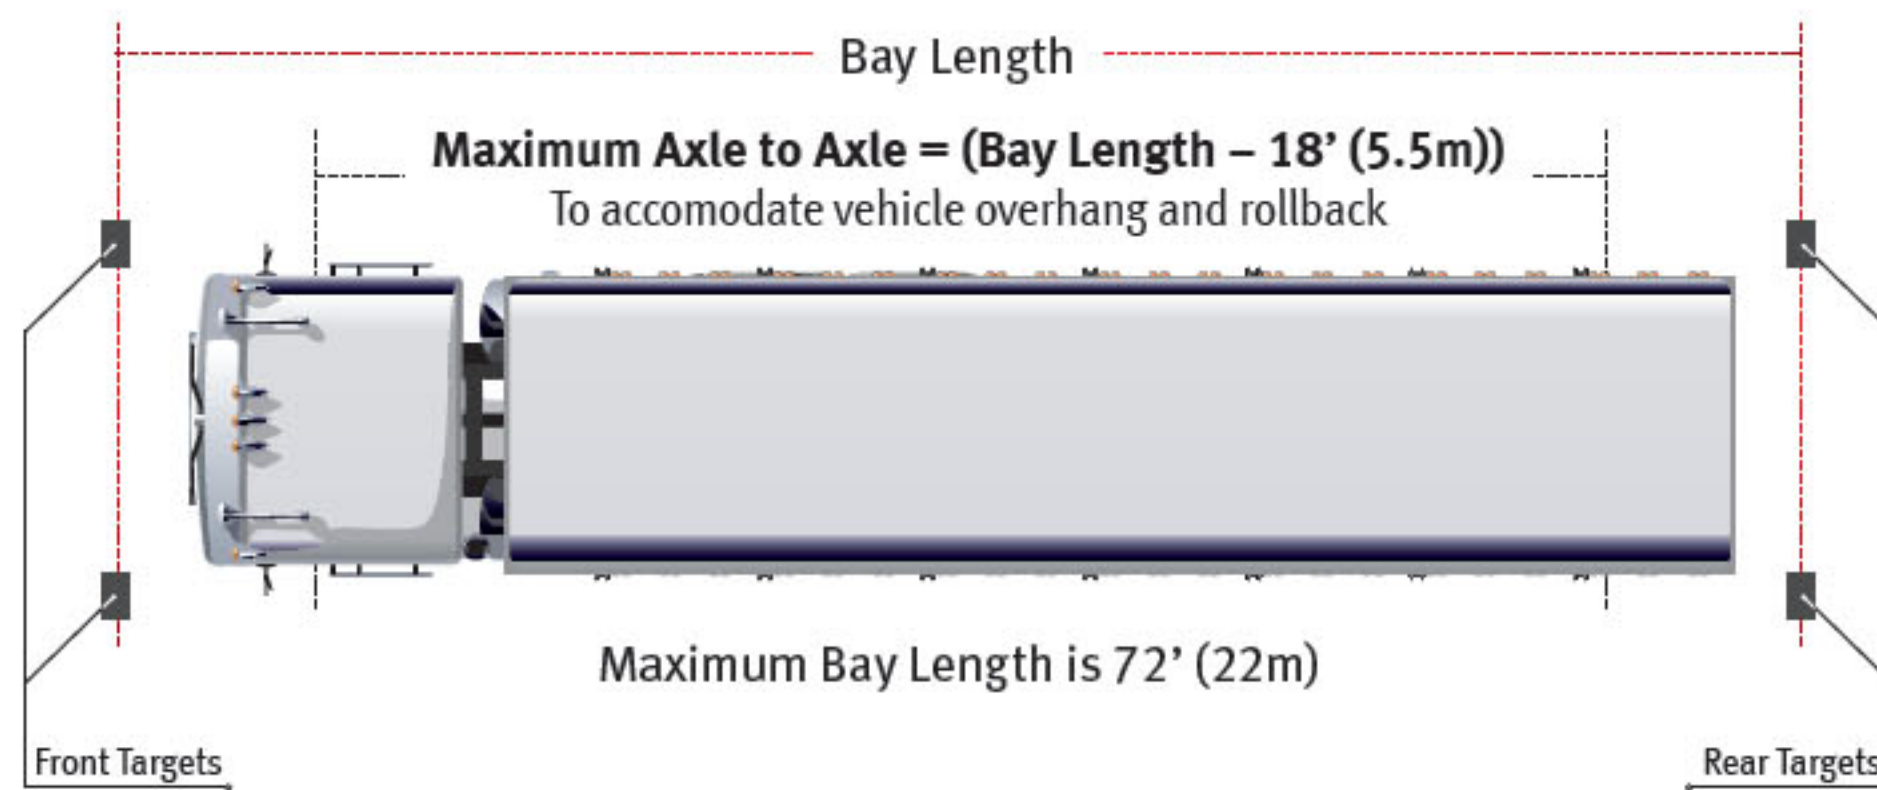

Bay length is the separation of the reference targets installed on the floor. Without limitations, the maximum allowed bay length is 72 feet and therefore the maximum length vehicle that can be measured is one with 54 feet between the first and last axle. Typically the size of the customer space determines the bay length. In that case, the maximum axle to axle length is the 18 feet less than the distance between the reference targets.

CONFIGURATION GUIDE



TRAILER BAR (EAK0350J62A)

Durable, lightweight aluminum construction separates in to three pieces for easy storage. Sits on stands creating a stable environment for repeatable, accurate readings.



EXTRA SET OF CLAMPS (EAK0350J47A)

Light-weight, all aluminum wheel clamps are easily mounted to a wide range of wheels, supporting inside and outside clamping

<p>STANDARD UNIT FOR UP TO THREE AXLES</p>	
<p>STANDARD UNIT PLUS A CLAMP SET FOR EACH AXLE OVER THREE</p>	
<p>BASED ON THE LENGTH OF THE BAY (MAX BAY LENGTH OF 72')</p>	<p>1 – If the vehicle fits into the bay, extra clamp sets will be needed for each axle over three 2 – If the vehicle does not fit in the bay, the truck/trailer will need to be split and a trailer bar will be required</p>
<p>STANDARD UNIT PLUS A TRAILER BAR FOR TRUCK/TRAILER SPLIT</p>	