



# Cable safety device

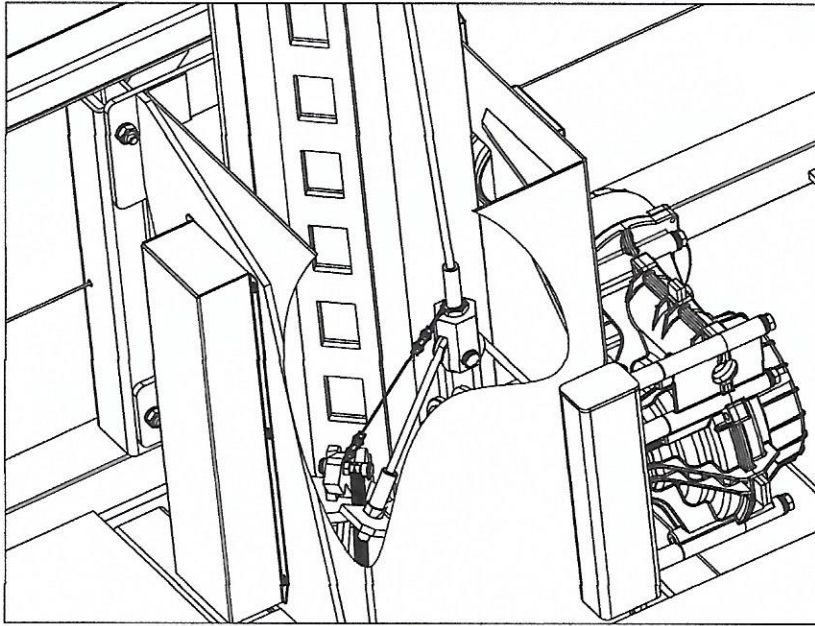


Normal status

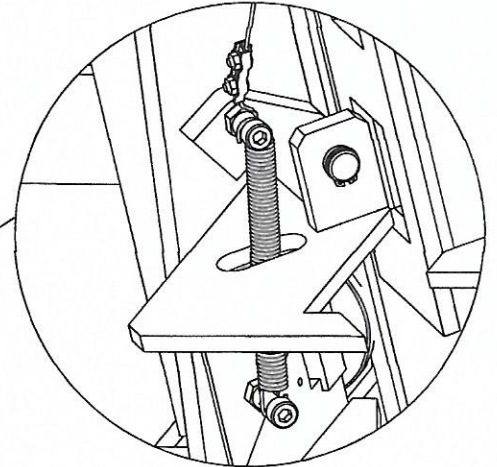


In case of the cable failure, the cable connection block will be pulled by the safety wire and move to the position as indicated by the arrow and engage into the nearest hole of the lock ladder (ref, below picture).

Safety wire

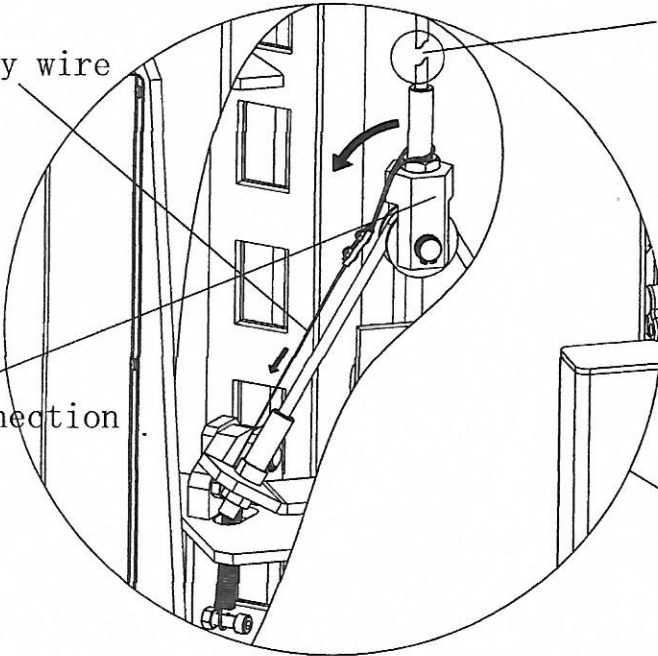

Cable connection block

Lock engagement

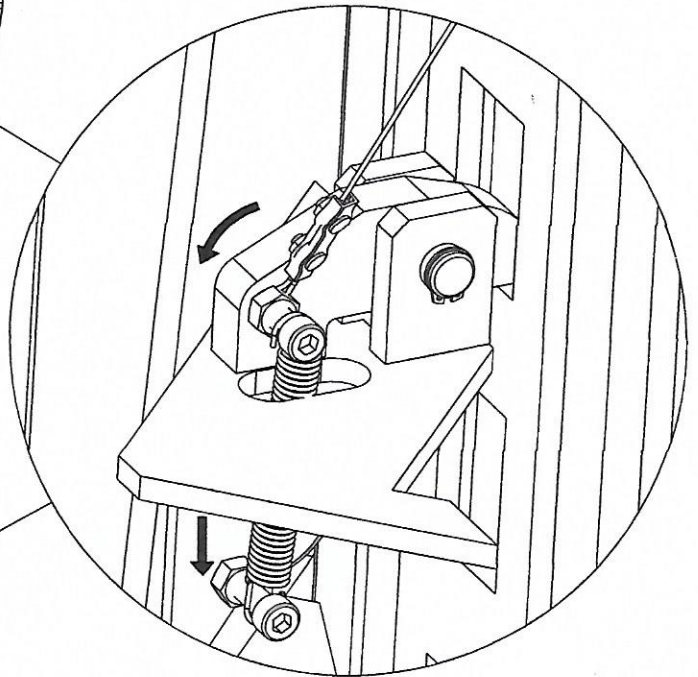

Safety wire

